


K-TVCC - Network CAM

General Features

K-TVCC - Network CAM	
Power Supply	12-24 VDC, 570 mA
Power Consumption (max.)	7 W
Power Consumption (stand-by)	4 W
Networking Interface	10/100 Ethernet Port
Optical Sensor	4 Mp CMOS Sensor
Optical Zoom	2.8 - 11 mm
Number of IR LEDs	36 LEDS
IR LEDs Range	25-30 m
Video Stream	NTSC, PAL
SNR	>50dB (AGC OFF)
Video Compression Standard	H.264
Video Bitrate	Dual Stream: 1-6Mbps
Frame Rate	Main Stream: 20-25fps Sub Stream: 25-30fps
Network Support	ONVIF Profile S, SDK, Milestone
Supported Protocols	TCP/IP, UDP, SMTP, PPOE, DDNS, SNTP, DHCP, FTP, uPnP, RTSP
Operating Humidity	<85%
Mounting	Pole-Mount (included)
Protection Degree	IP66
Dimensions	161 x 31 x 80 mm
Weight	760 g

Dimensions

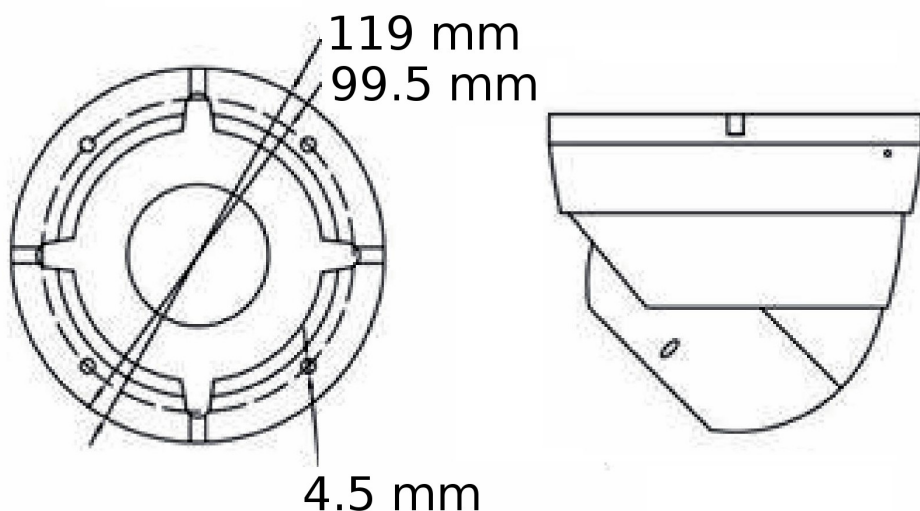

WESTERN CO.

Via Pasubio, 1/3 – San Benedetto del Tronto (AP)

TEL.: +39 0735 .751248 Fax: +39 0735 .751254